Taymor | PRODUCT SPECIFICATIONS

PREMIER LINE


SPECIFICATIONS

- > ENTRY LOCK SOLUTION FOR SINGLE FAMILY RESIDENTIAL BUILDINGS
- INCLUDES VEGA INTERIOR LEVER
- UNIVERSAL 6-IN-1 LATCH: DRIVE IN, SQUARE MORTISE AND RADIUS CORNER WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) - 2-3/4" (70 mm)
- INCLUDES ANTI-PRY COLLAR FOR REINFORCED SECURITY
- HIGH TENSILE STEEL ANTI-SAW DEADBOLT WITH 1" THROW
- STANDARD CENTER TO CENTER BORE DISTANCE: 5-1/2" (140 mm)
- STANDARD BORE HOLES: 2-1/8" (54 mm) ALSO FITS SMALL DEADBOLT BORE: 1-1/2" (38 mm)
- FITS STANDARD EXTERIOR DOOR THICKNESS: 1-3/4" (45 mm)
- FULL LIP RADIUS CORNER SPRING LATCH STRIKE WITH ADJUSTABLE TAB
- > HIGH SECURITY DEADBOLT STRIKE






VEGA INSIDE LEVER

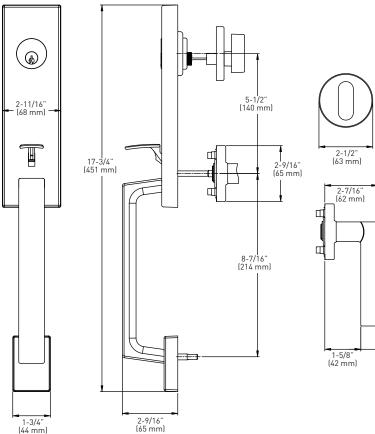


6-IN-1 ADJUSTABLE DEADBOLT LATCH


(E)




6-IN-1 SPRING LATCH



FULL LIP RADIUS STRIKE



HIGH SECURITY STRIKE



MEASUREMENTS SUBJECT TO A 3% VARIANCE

4-3/4" (121.5 mm)

3/4"

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS

BUILDER PACK	AGED BRONZE 10B+	SATIN NICKEL 15	MATTE BLACK 19	POLISHED CHROME 26	CASE QTY
London Handleset	30-D1016BRN	30-D1016SN	30-D1016BLK	30-D1016PC	4

